




YILE is not only the best choice,
But also the right hand assistant.

Yile[®]
YILE MACHINERY

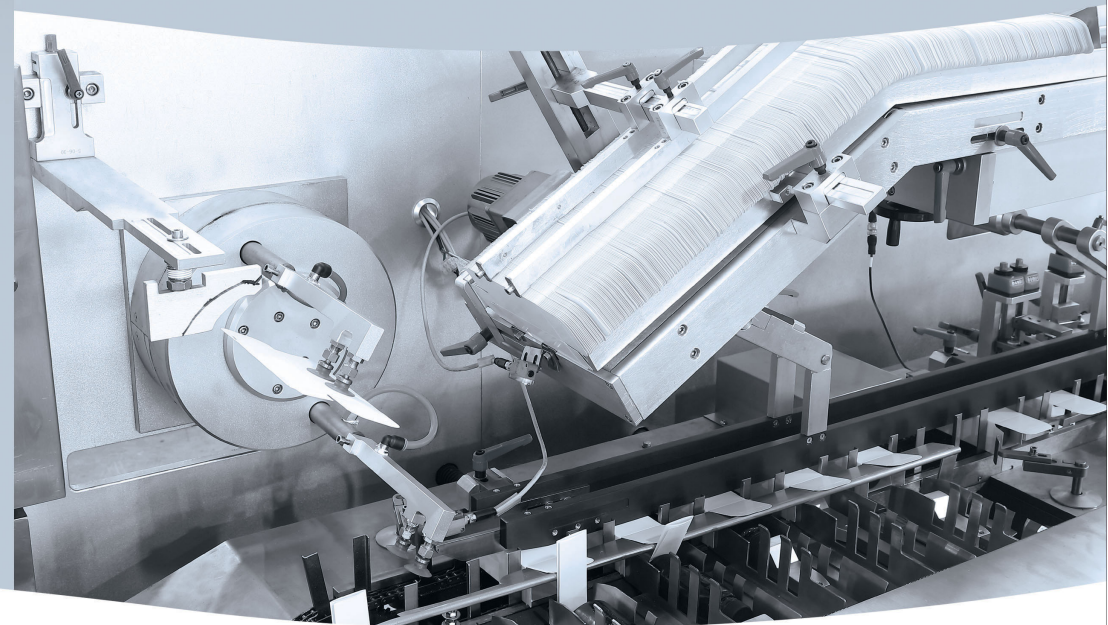

Yile[®]

Wenzhou Yile Machinery Co.,Ltd.

Add: Room 301, No.2-1 Building , Light Industrial Area, Yunjiang Standard Plant ,
No.1999 ,Songpu East Road, Nanbin Street, Ruian city ,Wenzhou, Zhejiang, China
Mobile/WhatsApp/Wechat : 0086 13566127969
E-mail: market@yilemachine.com SKYPE: higher112
<http://www.yilemachine.com>

2020.8



Automatic Cartoning Machine Manufacturer
For Pharmaceuticals, Foods, Cosmetics



COMPANY PROFILES

YILE Machinery company is the professional production enterprise , mainly produce cartoning machine used for cosmetic, pharmaceutical and food, including YL-40 Horizontal cartoning machine, YL-60 Horizontal cartoning machine ,YL-90 Horizontal cartoning machine, YL-60B Vertical Cartoning Machine ,YL-100 Horizontal cartoning machine ,YL-120 Horizontal cartoning machine, YL-160 Horizontal High speed cartoning machine, YL-200 High speed continuous cartoning machine, YL-300 High speed continuous cartoning machine, YL-450 Automatic Intermittent Cartoning Machine for aluminum foil, YL-450B Automatic Continuous Cartoning Machine for cling film, also cartoning machine production line (Pouch cartoning machine and case packing production line, molasses cartoning machine and cellophane wrapping production line, condom cartoning and cellophane wrapping production line, Vertical packing machine and cartoning machine and case packer machine production line), also produce case packer machine for cartons, pouches, bottles, case erector+case filling machine+case sealing machine, We specialize customizing machine for customer special sample.

We own rich technology, advanced manufacturing facility, reliable quality and good service after sale; at the same time, we carry out the ISO9001: 2000 international quality system standard uncompromisingly. Because of the high autoimmunization and good price, our machines have been sold all over the world from China and overseas such as U.S.A, Japan, Russia, Australia , Kuwait, Saudi Arabia , Singapore , South Africa, Czech Republic, Belgium, Hungary , Iran, Iraq ,India, Vietnam, Thailand, Pakistan, Uruguay, Malaysia, Indonesia, Canada, Chile, Mexico, Poland, Ukraine, and so on.

YILE is not only the best choice, but also the right hand assistant.

YILE look forward to cooperate with all customers and create a brilliant future!

Our Workshop Display:






Automatic Cartoning Machine and Packaging Equipments
For Pharmaceuticals, Foods, Cosmetics



YL-60 Automatic Cartoning Machine

Instruction:

Automatic Cartoning Machine can suitable for food product into carton, such as cake, biscuit, milk pouch, chocolate bar, coffee sachet, sticks, food sachet/pouch, ice cream/popsicle, cheese, frozen product, chicken, can, food tray, pillow pack product, film roller, tissue, bulb ,bearing, pencil, protective pad ,mask ,other product .The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes cantons opening and forming, products insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with VFFS Machine, Shrink Machine, Overwrapping Machine and pillow packing machine to form a production line.

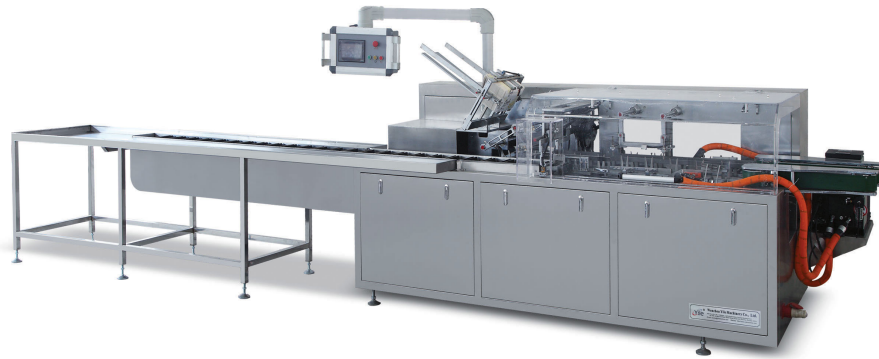

Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons .
- 5.No products no suction carton, Automatic detection and rejection device for lacking product.

Main Technical Parameters

Encasing speed	30-60 Boxes/min	
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(70-250) × (80-180) × (20-90)mm
Compressed Air	Working pressure	≥ 0.6Mpa
	Air consumption	20m ³ /h
Motor power	380V/50Hz 1.5kw	
Machine dimension (L × W × H)	3800 × 1350 × 1900mm	
Machine weight	1600kg	

Notes:If any change of data,we will not notify further.



YL-40 Automatic Cartoning Machine

Instruction:

Automatic Cartoning Machine can suitable for food product into carton, such as cake, biscuit, milk pouch, chocolate bar, coffee sachet, sticks, food sachet/pouch, ice cream/popsicle, cheese, frozen product, chicken, can, food tray, pillow pack product, film roller, tissue, bulb ,bearing, pencil, protective pad ,mask ,other product .The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes cantons opening and forming, products insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with VFFS Machine, Shrink Machine, Overwrapping Machine and pillow packing machine to form a production line.


Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons
- 5.No products no suction carton, Automatic detection and rejection device for lacking product.

Main Technical Parameters

Encasing speed	30-40 Boxes/min	
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(70-350) × (80-200) × (20-90)mm
Compressed Air	Working pressure	≥ 0.6Mpa
	Air consumption	20m ³ /h
Motor power	380V/50Hz 1.5kw	
Machine dimension (L × W × H)	4000 × 1350 × 1900mm	
Machine weight	1600kg	

Notes:if any change of data,we will not notify further.

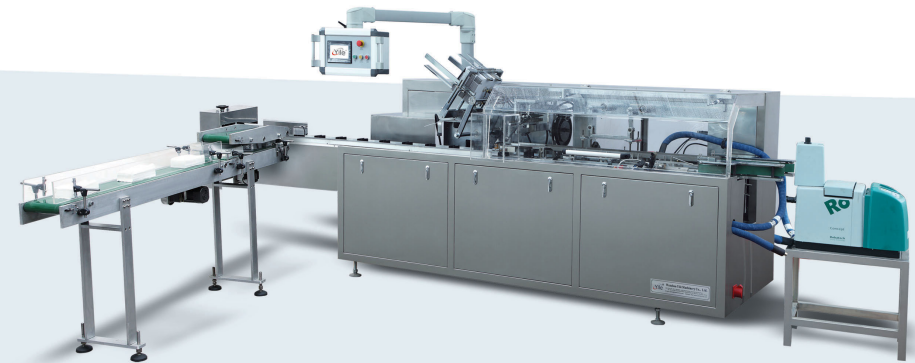

YL-90 Automatic Cartoning Machine For Food

Instruction:

Automatic Cartoning Machine can suitable for food product into carton, such as cake ,biscuit ,milk pouch ,chocolate bar ,coffee sachet , sticks, food sachet/pouch, ice cream/popsicle, cheese, frozen product, chicken, can, food tray, pillow pack product, film roller, tissue, bulb ,bearing, pencil, protective pad ,mask ,other product .The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes cantons opening and forming, products insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with VFFS Machine, Shrink Machine, Overwrapping Machine and pillow packing machine to form a production line.



Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons
- 5.No products no suction carton, Automatic detection and rejection device for lacking product.

Main Technical Parameters

Encasing speed	30-90 Boxes/min	
Carton	Quality requirement	250-450g/m ²
	Dimension range (L × W × H)	(100-250) × (70-120) × (20-90)mm
Compressed Air	Working pressure	≥ 0.6Mpa
	Air consumption	20m ³ /h
Motor power	380V/50Hz 1.5kw	
Machine dimension (L × W × H)	3800 × 1350 × 1900mm	
Machine weight	3000kg	

Notes:If any change of data,we will not notify further.



YL-100B Automatic Cartoning Machine

Instruction:

This product is the newest model which is our company further improved on the basis of advanced technologies at home and abroad. It is the high-tech product which integrates electricity, gas, light. The product is suitable for cartoning the pharmaceutical products, Foods, and cosmetic, poker, electronic and daily products and so on. The machine can finish automatically all jobs such as leaflet folding, carton opening automatically, the stuff cartooned, batch number printing, carton sealing and so on(also can use hot melt glue). It can be used alone, or be linked with the other device, to be a production line.

Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons
- 5.No products no suction carton, Automatic detection and rejection device for lacking product.

Main Technical Parameters

Encasing speed	20-80 Boxes/min	
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(55-200) × (14-90) × (13-65)mm
Compressed Air	Working pressure	≥ 0.6Mpa
	Air consumption	20m ³ /h
Motor power	380V/50Hz 1.5kw	
Machine dimension (L × W × H)	3800 × 1100 × 1900mm	
Machine weight	1500kg	

Notes:If any change of data,we will not notify further.



YL-200 Automatic High Speed Continuous Cartoning Machine

Instruction:

Automatic High Speed Continuous Cartoning Machine can suitable for food product into carton, such as cake, biscuit, milk pouch, chocolate bar, coffee sachet, sticks, food sachet/pouch, ice cream/popsicle, cheese, frozen product, chicken, can, food tray, pillow pack product, film roller, tissue, bulb, bearing, pencil, protective pad, mask, other product. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes cantons opening and forming, products insert into carton, printing batch number, sealing or option hot-glue device. The machine can be single used or linked with VFFS Machine, Shrink Machine, Overwrapping Machine and pillow packing machine to form a production line.


Feature:

1. International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
2. Adopt human-machine operation system.
3. Automatically displaying device for trouble, speed and finished products counting.
4. Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
5. No products not suction leaflet, no leaflet not suction carton.
6. Automatic detection and rejection device for lacking blister goods and leaflets.

Main Technical Parameters

Encasing Speed	100-200 Boxes/min	
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(100-200) × (60-130) × (12-70)mm
Leaflet	Quality requirement	60-70g/m ²
	Unfolded leaflet specification	(100-220) × (100-180)mm
	Fold range	[1-4] Fold
Compressed Air	Working pressure	≥0.6Mpa
	Air consumption	20m ³ /h
Motor power		380V/50Hz 2.2kw
Machine dimension (L × W × H)		5000 × 1700 × 1900mm
Machine weight		2000kg

Notes: If any change of data, we will not notify further.

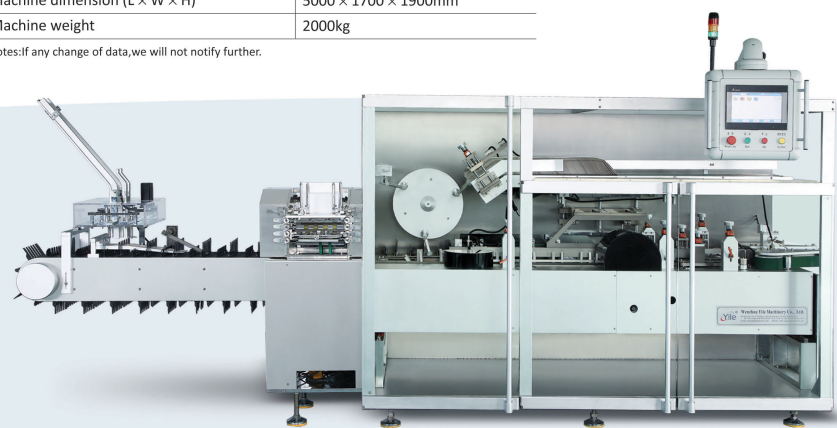

YL-300 Automatic High Speed Continuous Cartoning Machine

Instruction:

Automatic High Speed Continuous Cartoning Machine can suitable for pharmaceuticals product into carton, such as liquid in bottle (glass/flat), vial, tube/ointment, capsule/tablet blister, plaster, soft strips, injection, tray, syringe, ampoule and condom and sachet/pouch and other products. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1 to 4 folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing or option hot-glue device. The machine can be single used or linked with label machine, tube sealing and filling Machine, blister packing machine, shrink machine, overwrapping machine, bundling machine and case packer to form a production line.


Feature:

1. International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
2. Adopt human-machine operation system.
3. Automatically displaying device for trouble, speed and finished products counting.
4. Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
5. No products not suction leaflet, no leaflet not suction carton.
6. Automatic detection and rejection device for lacking blister goods and leaflets.

Main Technical Parameters

Encasing Speed	100-300 Boxes/min	
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(65-200) × (25-85) × (12-70)mm
Leaflet	Quality requirement	60-70g/m ²
	Unfolded leaflet specification	(100-220) × (100-180)mm
	Fold range	[1-4] Fold
Compressed Air	Working pressure	≥0.6Mpa
	Air consumption	20m ³ /h
Motor power		380V/50Hz 2.2kw
Machine dimension (L × W × H)		4450 × 1460 × 1700mm
Machine weight		2500kg

Notes: If any change of data, we will not notify further.

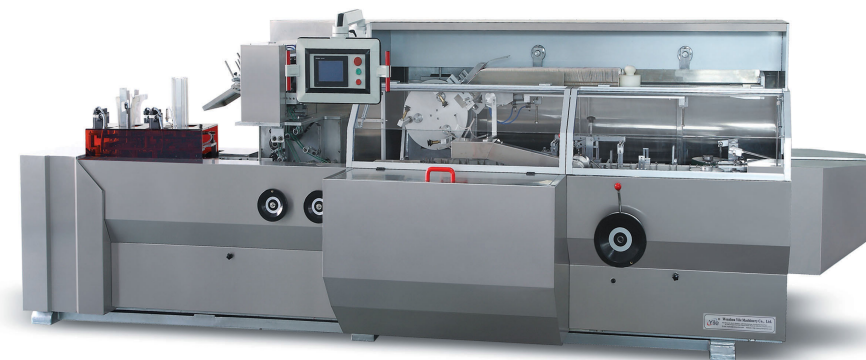

YL-100 Automatic Cartoning Machine

Instruction:

Automatic Cartoning Machine can suitable for pharmaceuticals product into carton, such as liquid in bottle(glass/flat),vial, tube/ ointment ,capsule/tablet blister, plaster, soft strips, injection, tray, syringe, ampoule and condom and sachet/pouch and other products. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1to 4folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with label machine, tube sealing and filling Machine, blister packing machine, shrink machine, overwrapping machine, bundling machine and case packer to form a production line



Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
- 5.No products not suction leaflet, no leaflet not suction carton.
- 6.Automatic detection and rejection device for lacking blister goods and leaflets.

Main Technical Parameters

Encasing Speed		30-120 Boxes/min
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(70-180) × (35-85) × (15-50)mm
Leaflet	Quality requirement	60-70g/m ²
	Unfolded leaflet specification	(80-250) × (90-170)mm
	Fold range	[1-4] Fold
Compressed Air	Working pressure	≥0.6Mpa
	Air consumption	120-160L/min
Motor power		220V/50Hz 0.75kw
Machine dimension (L × W × H)		3100 × 1100 × 1550mm
Machine weight		1500kg

Notes:if any change of data,we will not notify further.



YL-160 Automatic High Speed Cartoning Machine

Instruction:

Automatic High Speed Cartoning Machine can suitable for bottle(glass/flat), vial into carton. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1to 4folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing by option hot-glue device. The machine can be single used or linked with label machine, tube sealing and filling Machine, blister packing machine, shrink machine, overwrapping machine, bundling machine and case packer to form a production line.



Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
- 5.No products not suction leaflet, no leaflet not suction carton.
- 6.Automatic detection and rejection device for lacking blister goods and leaflets.


Main Technical Parameters

Encasing Speed		50-130 Boxes/min
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(55-200) × (25-85) × (12-70)mm
Leaflet	Quality requirement	60-70g/m ²
	Unfolded leaflet specification	(100-220) × (100-180)mm
	Fold range	[1-4] Fold
Compressed Air	Working pressure	≥0.6Mpa
	Air consumption	20m ³ /h
Motor power		380V/50Hz 1.5kw
Machine dimension (L × W × H)		3500 × 1320 × 1700mm
Machine weight		1300kg

Notes:if any change of data,we will not notify further.



YL-100 Automatic Cartoning Machine

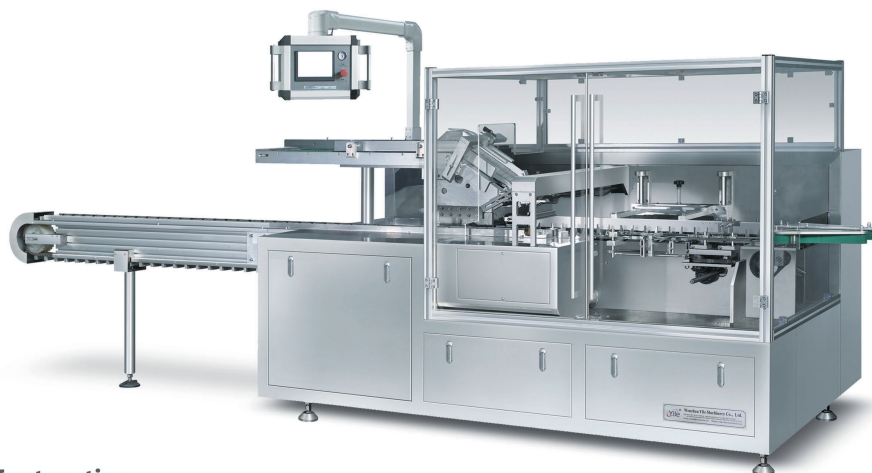

Instruction:

Automatic Cartoning Machine can suitable for pharmaceuticals product into carton, such as liquid in bottle(glass/flat), vial, tube/ointment, capsule/tablet blister, plaster, soft strips, injection, tray, syringe, ampoule and condom and sachet/pouch and other products. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1to 4folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with label machine, tube sealing and filling Machine, blister packing machine, shrink machine, overwrapping machine, bundling machine and case packer to form a production line.



Main Technical Parameters

Encasing Speed		30-100 Boxes/min
Box	Quality Requirement	250-350g/m ²
	Dimension Range (L×W×H)	(70-180)×(35-85)×(15-50)mm
	Quality Requirement	60-70g/m ²
Leaflet	Unfolded Leaflet Specification (L×W)	(80-250)×(90-170)mm
	Fold Range	(1-4) Fold
Compressed Air	Working Pressure	≥0.6mpa
	Air Consumption	120-160L/min
Power		220V/50Hz
Motor Power		0.75Kw
Machine Dimension(L×W×H)		3100×1100×1550mm
Machine Weight		1500Kg

Notes:If any change of data,we will not notify further.

YL-100P Automatic Cartoning Machine For Bottle

Instruction:

Automatic Cartoning Machine can suitable for bottle (glass/flat), vial into one carton. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1to 4folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with label machine, shrink machine, overwrapping machine, bundling machine and case packer to form a production line.

Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
- 5.No products not suction leaflet, no leaflet not suction carton.
- 6.Automatic detection and rejection device for lacking blister goods and leaflets.



Main Technical Parameters

Encasing Speed		30-100 Boxes/min
Box	Quality Requirement	250-350g/m ²
	Dimension Range (L×W×H)	(70-180)×(35-85)×(15-50)mm
	Quality Requirement	60-70g/m ²
Leaflet	Unfolded Leaflet Specification (L×W)	(80-250)×(90-170)mm
	Fold Range	(1-4) Fold
Compressed Air	Working Pressure	≥0.6mpa
	Air Consumption	120-160L/min
Power		220V/50Hz
Motor Power		0.75Kw
Machine Dimension(L×W×H)		4300×1100×1550mm
Machine Weight		1600Kg

Notes:If any change of data,we will not notify further.

YL-120 Automatic Cartoning Machine

Instruction:

Automatic Cartoning machine can suitable for pharmaceuticals product into carton, such as liquid in bottle(glass/flat),vial, tube/ointment ,capsule/tablet blister, plaster, soft strips, injection, tray, syringe, ampoule and condom and sachet/pouch and other products. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1to 4folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with label machine, tube sealing and filling Machine, blister packing machine, shrink machine, overwrapping machine, bundling machine and case packer to form a production line.



Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
- 5.No products not suction leaflet, no leaflet not suction carton .
- 6.Automatic detection and rejection device for lacking blister goods?and leaflets.

Main Technical Parameters

Encasing Speed		30-100 Boxes/min
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(65-125) × (35-85) × (15-50)mm
Leaflet	Quality requirement	60-70g/m ²
	Unfolded leaflet specification	(80-250)mm × (90-170)mm
	Fold range	【 1-4 】 Fold
Compressed Air	Working pressure	≥0.6Mpa
	Air consumption	120-160L/min
Motor power		220V/50Hz 0.75kw
Machine dimension (L × W × H)		2700 × 1140 × 1800mm
Machine weight		1200kg

Notes:if any change of data,we will not notify further.

YL-120P Automatic Cartoning Machine For Bottle

Instruction:

Automatic Cartoning machine can suitable for vial into carton. The machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes 1to 4folds leaflet automatic folding, cantons in suction and forming, products and leaflet insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with label machine, shrinking machine, overwrapping machine, bundling machine and case packer to form a production line.

Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons or out of leaflets continuous.
- 5.No products not suction leaflet, no leaflet not suction carton.
- 6.Automatic detection and rejection device for lacking blister goods and leaflets.

Main Technical Parameters

Encasing Speed		30-90 Boxes/min
Carton	Quality requirement	250-350g/m ²
	Dimension range (L × W × H)	(65-125) × (35-85) × (15-50)mm
Leaflet	Quality requirement	60-70g/m ²
	Unfolded leaflet specification	(80-250)mm × (90-170)mm
	Fold range	【 1-4 】 Fold
Compressed Air	Working pressure	≥0.6Mpa
	Air consumption	120-160L/min
Motor power		220V/50Hz 0.75kw
Machine dimension (L × W × H)		2150 × 1140 × 1800mm
Machine weight		1100kg

Notes:if any change of data,we will not notify further.



YL-450 Intermittent Automatic Cartoning Machine For Aluminum Foil

Instruction:

Automatic Cartoning Machine can suitable for aluminum foil, preservative film, cling film, plastic wrapper into carton. Machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes cartons opening and forming, products insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with VFFS Machine, Shrink Machine, Overwrapping Machine and pillow packing machine to form a production line.


Feature:

- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons
- 5.No products no suction carton. Automatic detection and rejection device for lacking product.

Main Technical Parameters

Encasing Speed	20-30 Boxes/min	
Carton	Quality requirement	250-450g/m ²
	Dimension range (L × W × H)	(100-450) × (20-80) × (20-90)mm
Compressed	Working pressure	≥ 0.6Mpa
Air	Air consumption	20m ³ /h
Motor power	380V/50Hz 1.5kw	
Machine dimension (L × W × H)	4200 × 1700 × 1700mm	
Machine weight	1600kg	

Notes:If any change of data,we will not notify further.

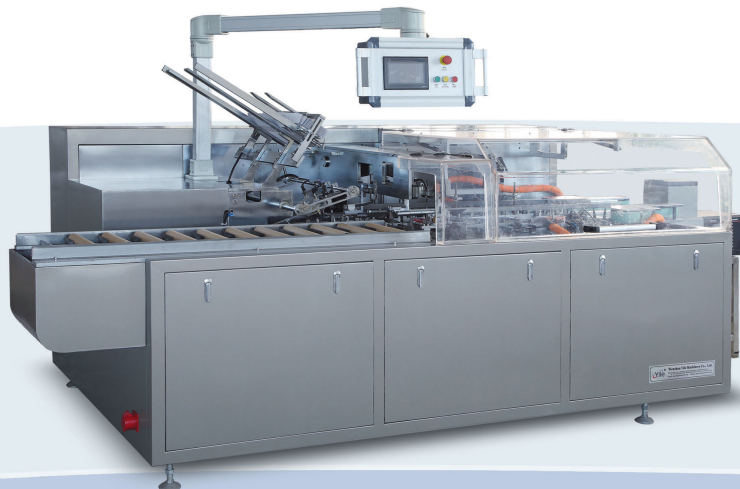

YL-450B Automatic Continuously Cartoning Machine For Aluminum Foil

Instruction:

Automatic Cartoning Machine can suitable for aluminum foil, preservative film, cling film, plastic wrapper into carton. Machine finished running by a series of photo-electro controller to make the machine stability and guarantee the packing quality. It includes cartons opening and forming, products insert into carton, printing batch number, sealing by tuck-in or hot-glue device. The machine can be single used or linked with VFFS Machine, Shrink Machine, Overwrapping Machine and pillow packing machine to form a production line.



Feature:



- 1.International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- 2.Adopt human-machine operation system.
- 3.Automatically displaying device for trouble, speed and finished products counting.
- 4.Machine running without pressing if no products or incorrect position of products. And stopping automatically if incorrect position of product into carton after return or no cartons
- 5.No products no suction carton. Automatic detection and rejection device for lacking product.

Main Technical Parameters



Encasing Speed	40-90boxes/min	
Carton	Quality requirement	300-450g/m ²
	Dimension range (L × W × H)	(100-480) × (25-80) × (25-55)mm
Compressed	Working pressure	≥ 0.6mpa
Air	Air consumption	140-180L/min
Power	380V/50Hz	
Motor power	2.2kw	
Machine dimension (L × W × H)	4400 × 2500 × 1800mm	
Machine weight	2000kg	

Notes:If any change of data,we will not notify further.

Automatic Cartoning Machine and Case Packer Machine Production Line

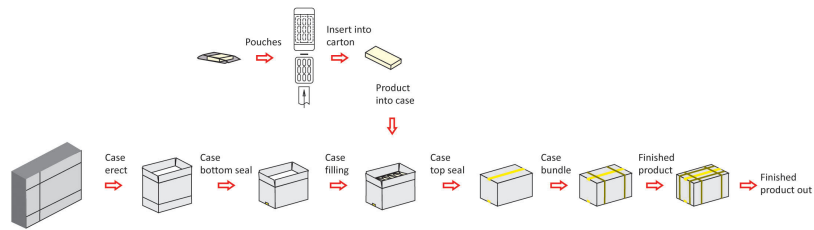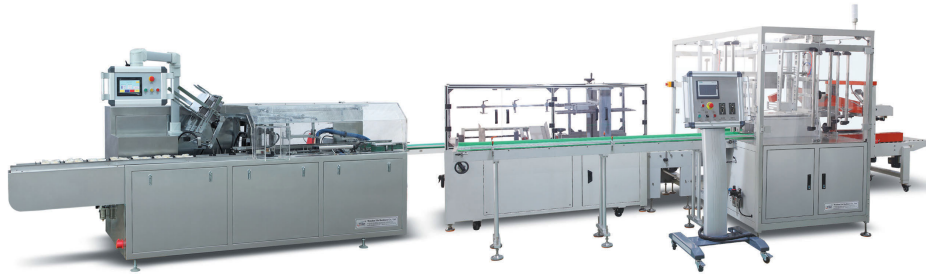

Cartoning Machine And Cellophane Wrapper And Sleeve Shrinker

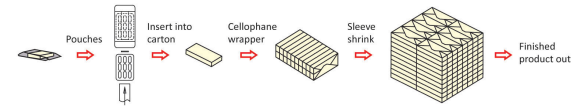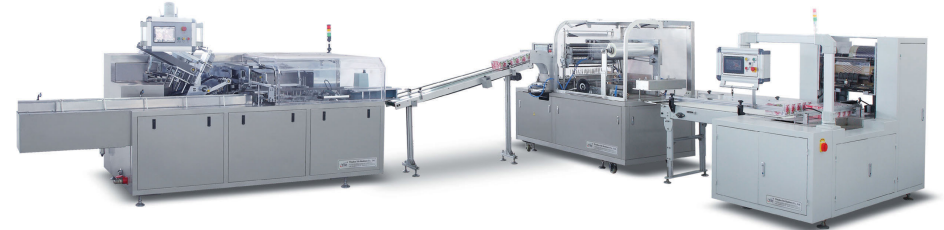

Automatic Condom Cartoning Machine And Cellophane Wrapping Machine Production Line

